



WM5300 Wall Mount Kit

WALL MOUNT FOR ENDURA NET5308T

Product Features

- Includes Three Frames for Use With the NET5308T and An Additional NET5308T-EXP
- Frames Can Be Placed On a Wall In Any Orientation
- Supplied Brackets Allow for the Easy Attachment of the Frames
- Maximum Installation of One NET5300B Base Module and Two NET5308T-EXP Video Input Modules
- For Use In Installations That Will Not Accommodate Standard Racks
- Compact, Wall-Hugging Design



A **WM5300** wall mount kit consists of three frames, four brackets, and 24 screws. The frames can be attached to a wall in any orientation providing a maximum of three slots. The NET5308T video encoder includes one NET5300B base module and one NET5308T-EXP video input module, but the **WM5300** can also accommodate an additional NET5308T-EXP module. The captive screws on each module are fastened to the frames ensuring a safe and secure installation.

The **WM5300** facilitates installation into areas that may not have a standard rack available. Its unique design allows for installation in a very small space since all of the connections are inside the framework of the module dimensions.

The **WM5300** was designed with the installer in mind. The wall mount kit allows for any installation challenge.

Endura distributed, network-based products are available only to certified dealers/integrators. Please contact your local sales representative for details on certification applications and requirements. Additional information on Endura products and certifications may be found at <http://www.pelco.com/endura>.



TECHNICAL SPECIFICATIONS

MODEL NUMBER

WM5300 Wall mount kit allowing the installation of a maximum of three modules


MECHANICAL

Number of Slots 3
Module Orientation Variable
Construction Aluminum
Finish Black

GENERAL

Dimensions 17.00" D x 20.00" W x 1.75" H
(43.18 x 50.80 x 4.45 cm)
Mounting Wall
Unit Weight 15 lb (6.80 kg)
Shipping Weight 21 lb (9.52 kg)

TYPICAL NET5308T INSTALLATION INTO WM5300

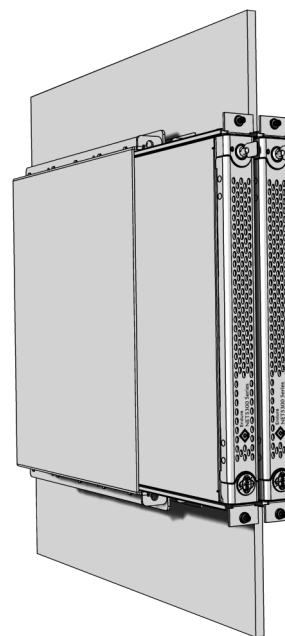

WARNING: Do not attach more than three WM5300 wall mount frames with NET5308T modules. The excessive weight can cause the equipment to fall from the wall. Use proper wall-attaching hardware suited for the wall type and weight of the attached devices.



Pelco Worldwide Headquarters:
3500 Pelco Way, Clovis, California 93612-5699 USA
USA & Canada Tel: (800) 289-9100 • FAX (800) 289-9150
International Tel: (559) 292-1981 • FAX (559) 348-1120
www.pelco.com

Pelco, the Pelco logo, and Coaxitron are registered trademarks of Pelco.
Endura and EnduraView are trademarks of Pelco.
Specifications subject to change without notice.
©Copyright 2007, Pelco. All rights reserved.